

CLAMP TOP POST INSULATORS




FIG. 1

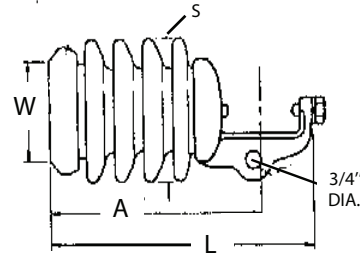


FIG. 2

CATALOG NUMBER	FIG. NO.	ANSI CLASS	DIM. A	DIM. L	DIM. S	DIM. W	LEAKAGE DISTANCE	USUAL LINE VOLTAGE	MAX. RIV	STD. PACK
U57 - 11G	1	57-11	---	10 1/8"	6"	4 1/4"	14	25 kV	100	6
U57 - 12G	1	57-12	---	13 1/8"	6 1/4"	5 1/4"	22	35 kV	100	3
U57 - 13G	1	57-13	---	15 3/4"	6 1/2"	5 1/4"	29	45 kV	200	3
U57 - 14G	1	57-14	---	19"	7"	5 1/2"	40	55 kV	200	3
U57 - 15G	1	57-15	---	21 5/8"	7 1/2"	5 1/2"	45	66 kV	200	3
UHCT - 25G	2	---	10 7/8"	13 1/2"	6"	4 1/4"	14	25 kV	100	3
UHCT - 35G	2	---	13 7/8"	16 1/2"	6 1/4"	5 1/4"	22	35 kV	100	3
UHCT - 45G	2	---	16 1/2"	19 1/8"	6 1/2"	5 1/4"	29	45 kV	200	3
UHCT - 55G	2	---	19 3/4"	22 3/8"	7"	5 1/2"	40	55 kV	200	2
UHCT - 66G	2	---	22 7/8"	25 1/2"	7 1/2"	6"	45	66 kV	200	2

THE ABOVE CLAMP TOP INSULATORS ARE OFFERED IN A "S KY GRAY" GLAZE. FOR BROWN COLOR, CHANGE THE SUFFIX "G" TO A "B". EACH OF THE ABOVE HAS A CANTILEVER STRENGTH OF 2800 POUNDS. MOUNTING BASES FOR FIGURE NUMBER 2 ARE AVAILABLE UPON REQUEST.