


POWER BUSHING ASSEMBLIES

23 KV CLASS, 150 KV BIL, 19.5" CREEP

These bushings are designed for transformer, switchgear, entrance, and special power apparatus applications. The electrical ratings given are based on use in a liquid filled transformer with the lower end of the bushing under oil. Bushings are fully oil and watertight both at the top terminal, and the mounting flange. Porcelain is gray glazed all over and the top skirts are designed for outdoor application.

Spade casting is pure copper and tin plated, 97% min. electrical conductivity guaranteed. Flanges and washers are non-magnetic. Constant gasket pressure to top terminal is maintained by a disc spring to compensate for the thermal expansion and contraction of the copper stud. Nitrile (Buna-N) gasket is standard. For ordering assemblies with the cork-rubber composition gaskets add the suffix "C" to the part number.

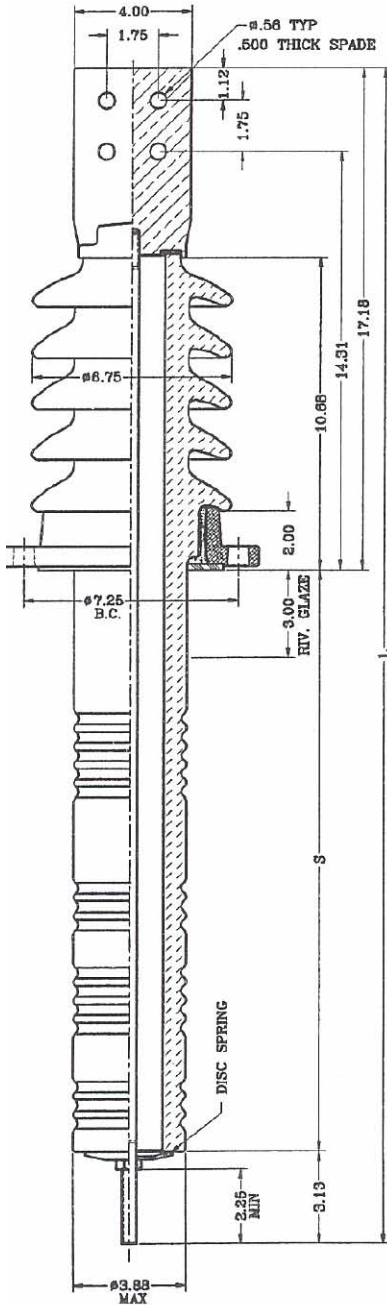

FLANGE DETAIL ON PAGE NO. PB-6

STUD SIZE	PART NUMBER	L	S
.500-13 UNC-2A 208A	354200	30.12	9.81
	354201	33.12	12.81
	354202	37.12	16.81
	354203	40.12	19.81
.625-18 UNF-2A 417 A	354205	30.12	9.81
	354206	33.12	12.81
	354207	37.12	16.81
.750-16 UNF-2A 600 A	354208	40.12	19.81
	354210	30.12	9.81
	354211	33.12	12.81
1.000-14 UNS-2A 800 A	354212	37.12	16.81
	354213	40.12	19.81
	354215	30.12	9.81
1.125-12 UNF-2A 1000 A	354216	33.12	12.81
	354217	37.12	16.81
	354218	40.12	19.81
1.250-12 UNF-2A 1200 A	354220	30.12	9.81
	354221	33.12	12.81
	354222	37.12	16.81
1.500-12 UNF-2A 1700 A	354223	40.12	19.81
	354225	30.12	9.81
	354226	33.12	12.81
1.750-12 UN-2A 2300 A	354227	37.12	16.81
	354228	40.12	19.81
	354230	30.12	9.81
2.000-12 UN-2A 2900 A	354231	33.12	12.81
	354232	37.12	16.81
	354233	40.12	19.81
2.000-12 UN-2A 2900 A	354240	30.12	9.81
	354241	33.12	12.81
	354242	37.12	16.81
	354243	40.12	19.81
2.000-12 UN-2A 2900 A	354245	30.12	9.81
	354246	33.12	12.81
	354247	37.12	16.81
	354248	40.12	19.81