




POWER BUSHING ASSEMBLIES 15 KV CLASS, 110 KV BIL, 15" CREEP

These bushings are designed for transformer, switchgear, entrance, and special power apparatus applications. The electrical ratings given are based on use in a liquid filled transformer with the lower end of the bushing under oil. Bushings are fully oil and watertight both at the top terminal, and the mounting flange. Porcelain is gray glazed all over and the top skirts are designed for outdoor application.

Spade casting is pure copper and tin plated. 97% min. electrical conductivity guaranteed. Flanges and washers are non-magnetic. Constant gasket pressure to top terminal is maintained by a disc spring to compensate for the thermal expansion and contraction of the copper stud. Nitrile (Buna-N) gasket is standard. For ordering assemblies with the cork-rubber composition gaskets add the suffix "C" to the part number.

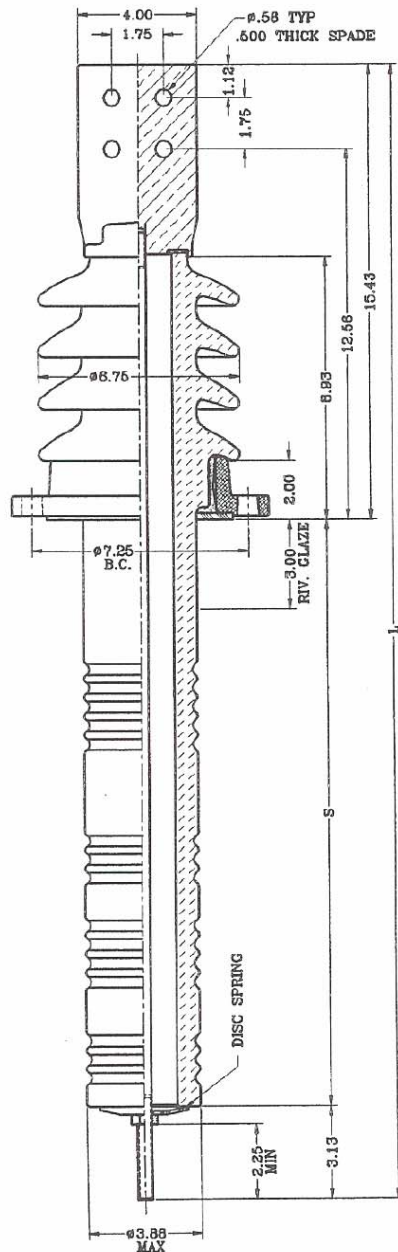

FLANGE DETAIL ON PAGE NO. PB-6

STUD SIZE	PART NUMBER	L	S
.500-13 UNC-2A 208A	353200	28.37	9.81
	353201	31.37	12.81
	353202	35.37	16.81
	353203	38.37	19.81
.625-18 UNF-2A 417 A	353205	28.37	9.81
	353206	31.37	12.81
	353207	35.37	16.81
.750-16 UNF-2A 600 A	353210	28.37	9.81
	353211	31.37	12.81
	353212	35.37	16.81
1.000-14 UNS-2A 800 A	353213	38.37	19.81
	353215	28.37	9.81
	353216	31.37	12.81
1.125-12 UNF-2A 1000 A	353217	35.37	16.81
	353218	38.37	19.81
	353220	28.37	9.81
1.250-12 UNF-2A 1200 A	353221	31.37	12.81
	353222	35.37	16.81
	353223	38.37	19.81
1.500-12 UNF-2A 1700 A	353225	28.37	9.81
	353226	31.37	12.81
	353227	35.37	16.81
1.750-12 UN-2A 2300 A	353228	38.37	19.81
	353230	28.37	9.81
	353231	31.37	12.81
2.000-12 UN-2A 2900 A	353232	35.37	16.81
	353233	38.37	19.81
	353240	28.37	9.81
1.750-12 UN-2A 2300 A	353241	31.37	12.81
	353242	35.37	16.81
	353243	38.37	19.81
	353245	28.37	9.81
2.000-12 UN-2A 2900 A	353246	31.37	12.81
	353247	35.37	16.81
	353248	38.37	19.81
	353248	38.37	19.81