

CHARACTERISTICS/TESTS

In accordance with ANSI C29.9

Glaze: Light-grey Munsell Notations N°70
 Approximate weight 123.5 lbs

DIMENSIONS

Minimum leakage distance 72 in

MECHANICAL VALUES

Cantilever breaking strength, upright 3000 lbs
 Cantilever breaking strength, underhung 3000 lbs
 Tensile breaking strength 25000 lbs
 Torsional breaking moment 71000 in.lbs
 Compression breaking strength 100000 lbs

ELECTRICAL VALUES

Guaranteed voltage:
 Critical impulse dry, wave 1.2/50 - positive polarity 390 kV
 Power frequency wet, withstand 145 kV
 Impulse dry, wave 1.2/50 - withstand, positive polarity 350 kV


Test voltage 44 kV
 Maxi RIV at 1 MHz 200 µV

GENERAL TOLERANCE

± (0.04d + 0.06) in., if d ≤ 11.8 in.
 ± (0.025d + 0.24) in., if d > 11.8 in.

CONVERSION TABLE

DIMENSIONS	1.	mm	0.03937	inch
	25.4	mm	1	inch
FORCE	1	N	0.22481	pound
	4.448	N	1	pound
MOMENT OF FORCE	1	Nm	8.8495	inch-pound
	0.113	Nm	1	inch-pound

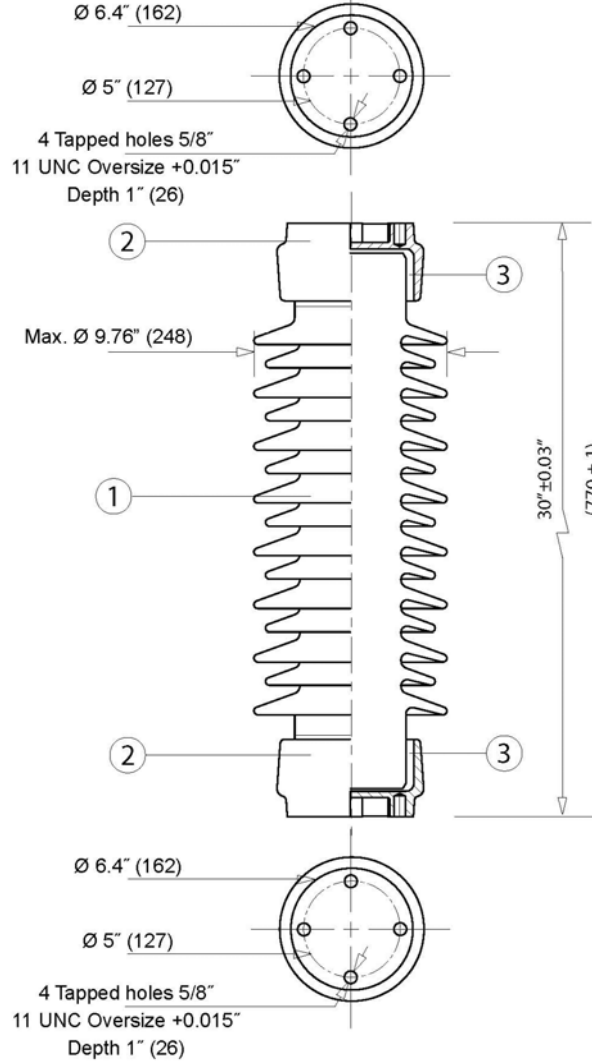

1	Porcelain	Glazed Light-grey
2	Cap Fitting	K-127-491-116
3	Cementing	Portland cement
4	/	/
5	/	/
6	/	/
7	/	/

Nb	DESIGNATION	MATERIAL
Top and bottom bolts are not furnished		
1	B-05006	Rev 1
/	/	/
Qty	REFERENCE	DESIGNATION

MODIFICATIONS	/			
	/			
	/			
	/			
	/			
	/			
	/			

Outdoor post insulator
 Cat. ID.
350 HU
TR-278

Meister International, LLC
 Tel: 513-923-2712 Fax: 513-923-1978
 sales@meisterintl.com www.meisterintl.com